

WINDOOR

INCORPORATED

7000 Series


Sliding Glass Door System

Impact or Non Impact

Aluminum Panel Sizes Up To 5'0 x 8'2-inch High Door

Systems: Available in Bypass & Pocket door units with multi configurations.

Featuring 2 - 3 & 4 Track Sliding Glass Door Systems

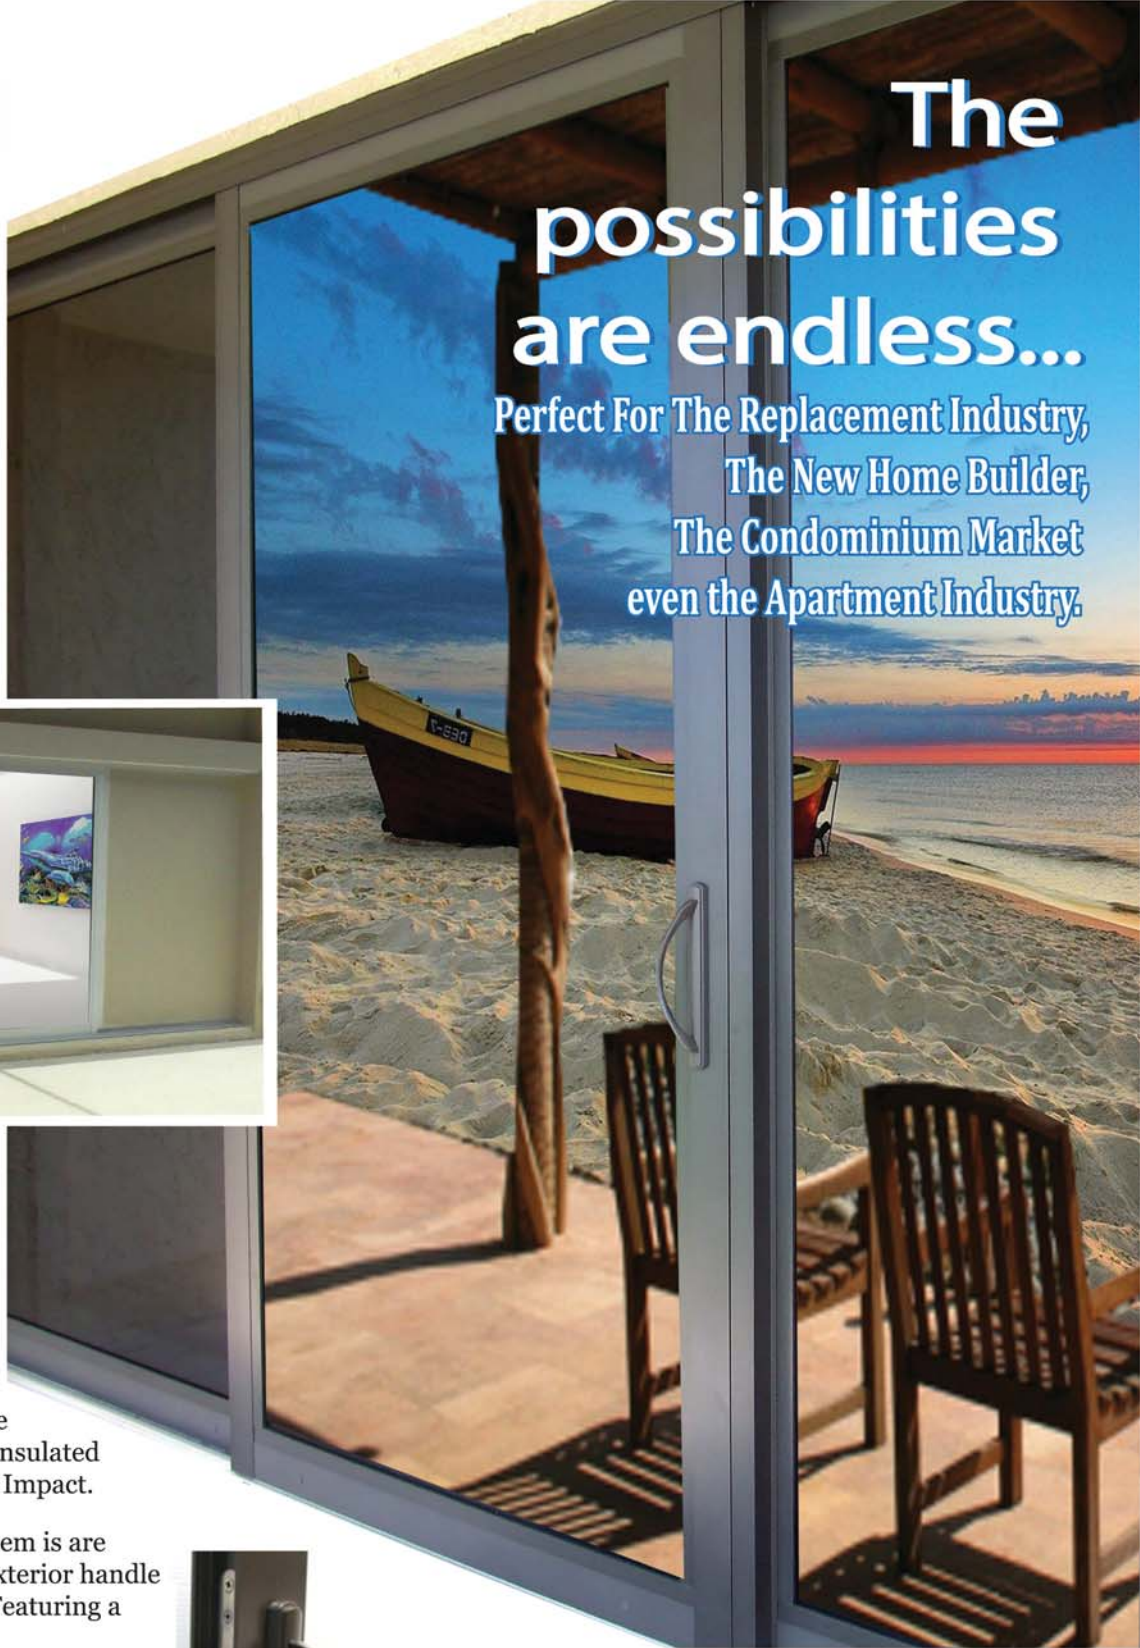

The possibilities are endless...

Perfect For The Replacement Industry,
The New Home Builder,
The Condominium Market
even the Apartment Industry.

Color Finishes:   

White & Bronze also available in South Beach Silver Clear Anodized 215 Class 1. AAMA 2603, 2604* and 2605 - Custom Color Match Finishes always available.

 **Low - E Glass Options:** Offering a wide range of low-e glass choices. Single glazed - Insulated Non-Impact & Insulated Large Missile Impact.


Handles: The EURO Handle System is are Standard Metal full-size interior and exterior handle that is available in a variety of colors. Featuring a large easy to operate pull handle.

Optional Recessed Euro Pull Handle Will Not Allow Panels To bypass by Special Request



Locking Systems Anti-Slam:

Adjustable stainless steel dual-point mortise locks provide Level 10 Forced Entry Resistance as tested to AAMA standards. Secondary locking system available, exterior key lock available as well.*



Tested Tuff... Design Performance:

7000 Series 5'0 x 8'2-inch High Door
Non-Impact & Impact Tested *Up To* +75 / -75
7000 H.P Series 4'0 x 8'2-inch High Door
Non-Impact & Impact Tested *+80 / -90*



www.WinDoorInc.com

See other side for more details


WinDoor 7000 Series Sliding Glass Door System

Tested for High Performance Capabilities: Miami-Dade, AMMA/NWDA & ASTM Certified To Heavy Commercial Standards - Our Sliding Glass Doors not only meets the most stringent of Miami/Dade product approvals TAS 201, TAS 202, TAS 203, Florida State Wide Product Approvals & (TDI) Texas Department of Insurance... We also tested ASTM E-1300, E-1886 & E-1996 with AAMA 506 impact codes required by states in the United States of America.

Panels: have a depth of 1-5/16" with 4" wide stiles and rails.

Sizes: 7000 Series 5 feet wide x 8 feet 2 inches - 7000 H.P 4 feet wide x 8 feet 2 inches

Master Frame: Installation trim pack for versatility installation for new construction or retrofit. Beauty caps to conceal stainless steel fasteners.



Muntins*: Inside and outside muntins enhance the design. Internal muntins available for insulated glass panels.

Dual Fin-Seal Weather-stripping: Two sets of polypropylene fiber weather stripping concealed in panel perimeters. Keeps the elements out and reduces energy costs year after year.


Internal Structural Reinforcement: 6061-T6 aluminum alloy reinforcement added to maintain both the architectural design integrity and provide higher design pressures.



WinDoor Offers A Unlimited Number Of Configurations and Panels

These are just a few of our Sliding Glass Door Configurations - Also Available WITH or WITHOUT Pockets.

Impact-Resistant Glazing: Large missile 7/16" & 9/16" single glazed and 3/4" tempered insulated glass. Protects against damage caused by windborne debris and intruders. and greatly reduces sound transmission.




Eliminates the need for unsightly and inconvenient storm shutters. We call it... **Passive Protection 24/7**

Non-Impact Glazing: Tempered glass 3/16" & 1/4" and 3/4" tempered insulated glass for locations not requiring impact glazing.

Screens: Heavy-duty standard box exterior screen with frame depth of 1-1/8" x 2-5/8". Featuring adjustable stainless steel 1-5/8" Delrin® wheels. Featuring: **BETTER VUE** Screens (Standard)
See the view, not the screen

True Coastal Hardware Locking Hardware and Rollers: Standard Stainless Steel housed adjustable tandem rollers with 1-5/8" Delrin® wheels. Insures trouble-free operation in salt air environments allowing the doors to operate easily and quietly.

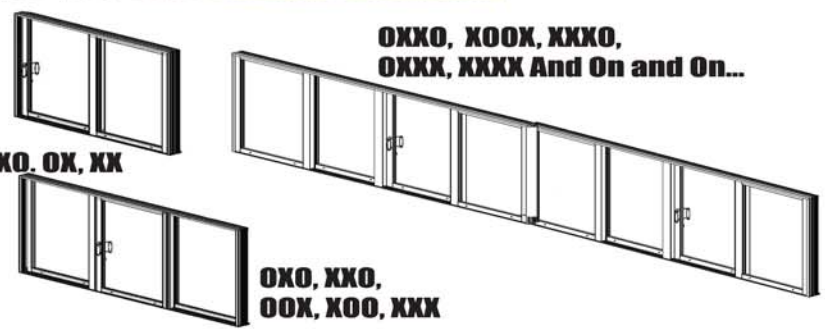

(X) Operable Or Movable Panels (O) Stationary or Fixed Panels




The 7000 Offers 3 Different Blade Track/Sill Options.

SILL RISER OPTIONS

Whatever the demands of your specific location, we can provide the sill riser to handle the rain. (See the chart below.)

Offers 3 Different Sill Riser Heights

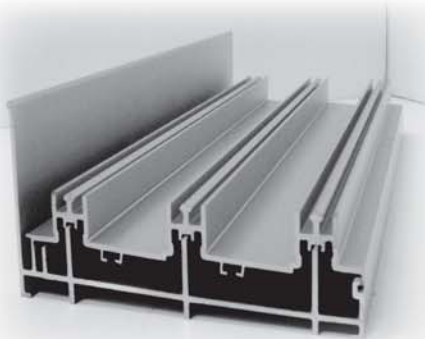

Sill Riser Height	Lab Results
2- 1/2"	9.0 psf
3- 1/8"	12.0 psf
4- 1/4"	18.0 psf


2-Track sill depth = 3- 9/16"



3-Track Sill Depth = 5- 1/2"



4-Track Sill Depth = 7- 1/2"

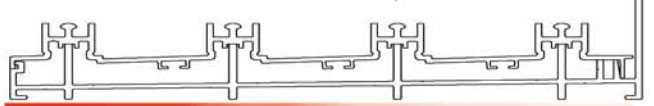

WinDoor Incorporated reserves the right to change materials design and or construction without notice or liability